




Floodlights

BAT53 Series Explosion-proof Floodlights

- ◆ Explosion protection to
 - CENELEC
 - IEC
 - NEC
- ◆ Can be used in
 - Zone 1 and Zone 2
 - Zone 21 and Zone 22
- ◆ Four enclosure types: 125, 250, 400, 1000.
- ◆ Integral control gear, easy installation and maintenance.
- ◆ Rapid starting trigger, stable performance and long service life.
- ◆ Enclosure in copper-free aluminium, powder coated external surface, yellow (RAL1021).
- ◆ Toughened glass cover resistant to temperature changes.

Catalogue number logic

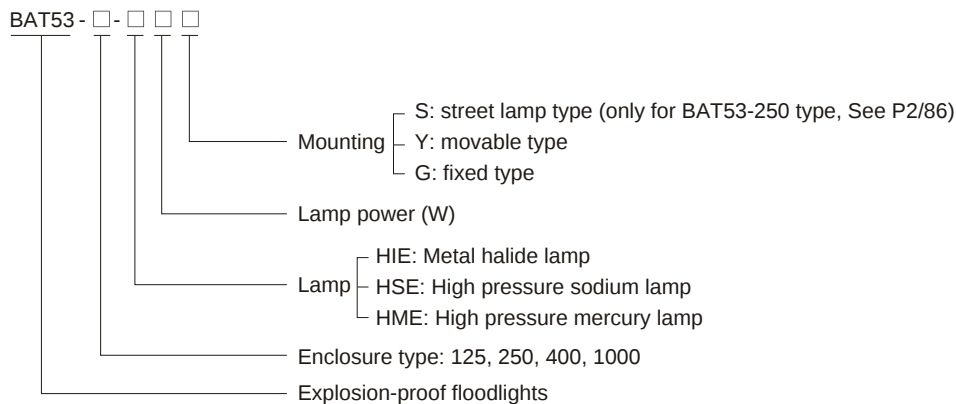

Selection table

Type/Ordering code	Available lamp power (W)			Lamp holder	Weight (kg)
	HIE	HSE	HME		
BAT53-125	70, 100, 150	70, 100	80, 125	E27	8.45
BAT53-250	175, 250	150, 250	175, 250	E40	14.75
BAT53-400	400	400	-	E40	30.75
BAT53-1000	1000	1000	-	E40	58.00

Note

1. Please specify any spare parts when ordering. See Accessories table.
2. 125, 250 and 400 type light fittings are supplied without lamp. PHILIPS lamps are recommended.
3. HPI European standard ballast is supplied with HIE light fitting. HPI European standard lamps are recommended.
4. 1000 type light fittings are supplied with lamp and ballast.

Zones 1&2; 21&22

Technical data

Explosion-proof floodlights

BAT53-125-□□□

Explosion protection

Gas explosion protection

Dust explosion protection

Ex II 2 G Ex de IIB T4 Ex de IIB T4 Gb

Ex tD A21 T130°C IP65

Certificates

For gas explosion protection

For dust explosion protection

LCIE 05 ATEX 6143; IECEx CQM 07.0004; FM (USA)

PCEC (China)

Conformity to standards

EN 60079-0: 2004, EN 60079-1: 2004, EN 60079-7: 2003

IEC 60079-0: 2007, IEC 60079-1: 2007, IEC 60079-7: 2006

IEC 61241-0: 2004, IEC 61241-1: 2004

Material

Enclosure

Ballast

Wire guard

Internal reflector

Trigger

Capacitor

Exposed fastener

Copper-free aluminium, powder coated external surface, yellow (RAL1021)

Choke ballast, rapid starting, stable performance

Powder coated carbon steel, white

High-purity aluminium

Explosion-proof electronic trigger

Power factor ≥ 0.85 (compensated)

Stainless steel

Lamp

Lamp holder

Available lamp and lamp power (W)

E27

High pressure sodium lamp (HSE): 70W, 100W

High pressure mercury lamp (HME): 80W, 125W

Metal halide lamp (HIE): 70W, 100W, 150W

Note: HPI European standard ballast is available in general

220~240V AC 50Hz (60Hz is optional)

M5 (internal & external earth bolts)

Rated voltage

Earthing protection

Degree of protection

Ambient temperature

Terminal

Cable entries

Available cable outer diameter

IP65


-20°C ~ +55°C

3 x 1.5~2.5mm² (L+N+PE)

2 x $\Phi 21$: 1 x M20 x 1.5 cable gland (DQM-I Ex e, carbon steel), 1 x M20 x 1.5 plug

$\Phi 5 \sim \Phi 10$ (mm)

Dimension drawings (all dimensions in mm) - subject to alteration

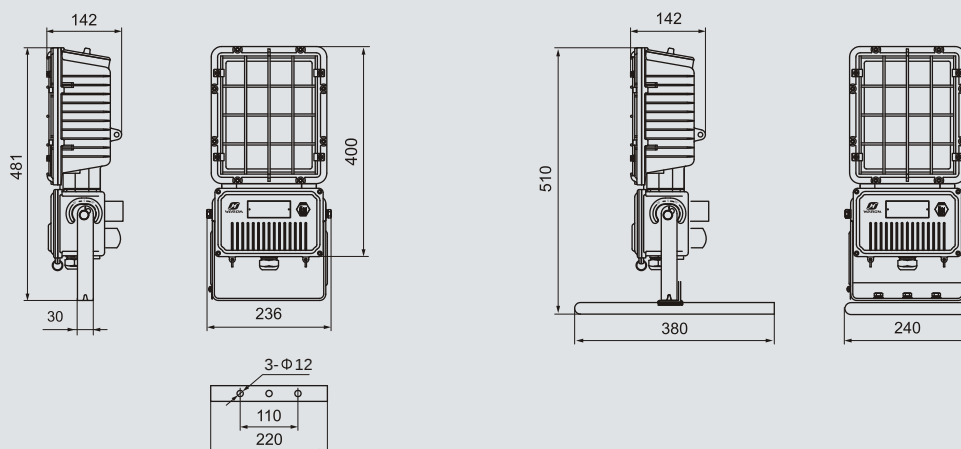

G: fixed type

Y: movable type



Technical data

Explosion-proof floodlights

BAT53-250-□□□

Explosion protection

Gas explosion protection

Dust explosion protection

Certificates

For gas explosion protection

For dust explosion protection

Conformity to standards

Material

Enclosure

Ballast

Wire guard

Internal reflector

Trigger

Capacitor

Exposed fastener

Lamp

Lamp holder

Available lamp and lamp power (W)

Rated voltage

Earthing protection

Degree of protection

Ambient temperature

Terminal

Cable entries

Available cable outer diameter

Ex II 2 G Ex de IIB T3

Ex de IIB T3 Gb

Ex tD A21 T190°C IP65

LCIE 05 ATEX 6143; IECEx CQM 07.0004; FM (USA)

PCEC (China)

EN 60079-0: 2004, EN 60079-1: 2004, EN 60079-7: 2003

IEC 60079-0: 2007, IEC 60079-1: 2007, IEC 60079-7: 2006

IEC 61241-0: 2004, IEC 61241-1: 2004

Copper-free aluminium, powder coated external surface, yellow (RAL1021)

Choke ballast, rapid starting, stable performance

Powder coated carbon steel, white

High-purity aluminium

Explosion-proof electronic trigger

Power factor ≥ 0.85 (compensated)

Stainless steel

E40

High pressure sodium lamp (HSE): 150W, 250W

High pressure mercury lamp (HME): 175W, 250W

Metal halide lamp (HIE): 175W, 250W

Note: HPI European standard ballast is available in general

220~240V AC 50Hz (60Hz is optional)


M5 (internal & external earth bolts)

IP65

-20°C ~ +55°C

3 x 1.5~2.5mm² (L+N+PE)2 x $\Phi 26$: 1 x M25 x 1.5 cable gland (DQM-I Ex e, carbon steel), 1 x M25 x 1.5 plug $\Phi 10 \sim \Phi 14$ (mm)

Dimension drawings (all dimensions in mm) - subject to alteration

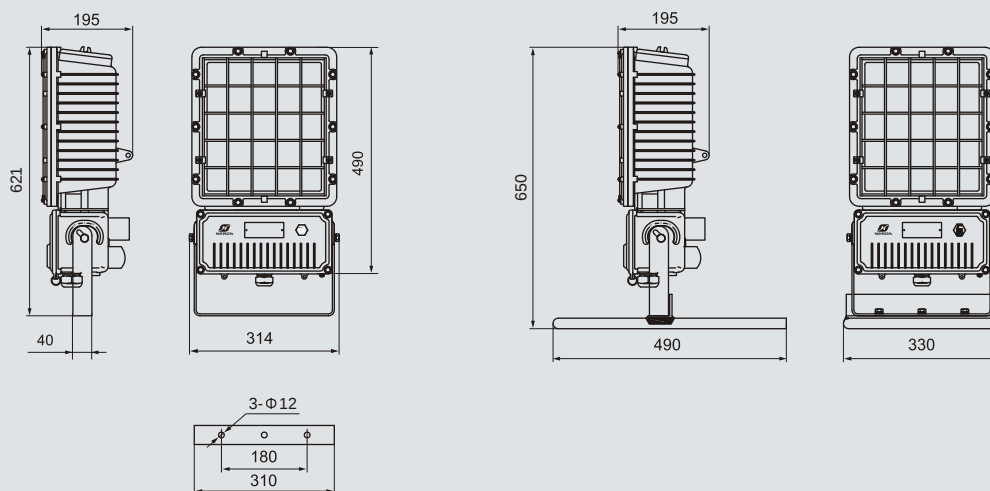

G: fixed type

Y: movable type

Technical data

Explosion-proof floodlights

BAT53-400-□□□

Explosion protection

Gas explosion protection

Ex II 2 G Ex de IIB T3

Dust explosion protection

Ex tD A21 T190°C IP65

Certificates

For gas explosion protection

LCIE 07 ATEX 6106; IECEx CQM 08.0014; BR229792 (Brazil); FM (USA)

For dust explosion protection

PCEC (China)

Conformity to standards

EN 60079-0: 2004, EN 60079-1: 2004, EN 60079-7: 2003

IEC 60079-0: 2004, IEC 60079-1: 2003, IEC 60079-7: 2001

IEC 61241-0: 2004, IEC 61241-1: 2004

Material

Enclosure

Copper-free aluminium, powder coated external surface, yellow (RAL1021)

Ballast

Choke ballast, rapid starting, stable performance

Internal reflector

High-purity aluminium

Trigger

Explosion-proof electronic trigger

Capacitor

Power factor ≥ 0.85 (compensated)

Exposed fastener

Stainless steel

Lamp

Lamp holder

E40

Available lamp and lamp power (W)

High pressure sodium lamp (HSE): 400W (tubular)

Metal halide lamp (HIE): 400W (tubular)

Note: HPI European standard ballast is available in general

220~240V AC 50Hz (60Hz is optional)

M5 (internal & external earth bolts)

IP65

-20°C ~ +55°C

3 x 1.5~2.5mm² (L+N+PE)

2 x M25 x 1.5: 1 x M25 x 1.5 cable gland (DQM-I Ex e, carbon steel), 1 x M25 x 1.5 plug

Φ10~Φ14 (mm)

Rated voltage

Earthing protection

Degree of protection


Ambient temperature

Terminal

Cable entries

Available cable outer diameter

Dimension drawings (all dimensions in mm) - subject to alteration

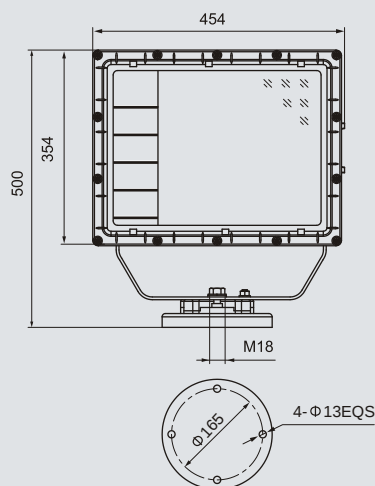

Technical data

Explosion-proof floodlights

BAT53-1000-□□□

Explosion protection

Gas explosion protection

Dust explosion protection

Certificates

Conformity to standards

Material

Enclosure

Ballast

Trigger

Capacitor

Internal reflector

Exposed fastener

Lamp

Lamp holder

Available lamp and lamp power (W)

Rated voltage

Earthing protection

Degree of protection

Ambient temperature

Terminal

Cable entries

Cable gland

Available cable outer diameter

 Ex II 2 G Ex d IIC T3 Gb

 Ex II 2 D Ex t IIIC T190°C Db IP65

PCEC (China); LCIE 12 ATEX _____

EN 60079-0: 2009, EN 60079-1: 2007, EN 60079-31: 2009

IEC 60079-0: 2007, IEC 60079-1: 2007, IEC 60079-31: 2008

Copper-free aluminium, powder coated external surface, yellow (RAL1021)

Choke ballast, rapid starting, stable performance

General trigger

 Power factor ≥ 0.85 (compensated)

High-purity aluminium

Stainless steel

E40

High pressure sodium lamp (HSE):1000W

Metal halide lamp (HIE):1000W

Note: HPI European standard ballast is available in general

230V AC 50Hz (60Hz is optional)

M5 (internal & external earth bolts)

IP65

-20°C ~ +55°C


 3 x 1.5 ~ 2.5mm² (L+N+PE)

1 x M25 x 1.5

The cable between floodlight and ballast through BNG-M25 x 1.5(M)/M25 x 1.5(M) explosion-proof flexible conduit (length: 1000 mm); One explosion-proof cable gland (DQM-II-M25 x 1.5, Ex d, brass, armored, cable wiring)

 $\Phi 10 \sim \Phi 14$ (mm)


Dimension drawings (all dimensions in mm) - subject to alteration

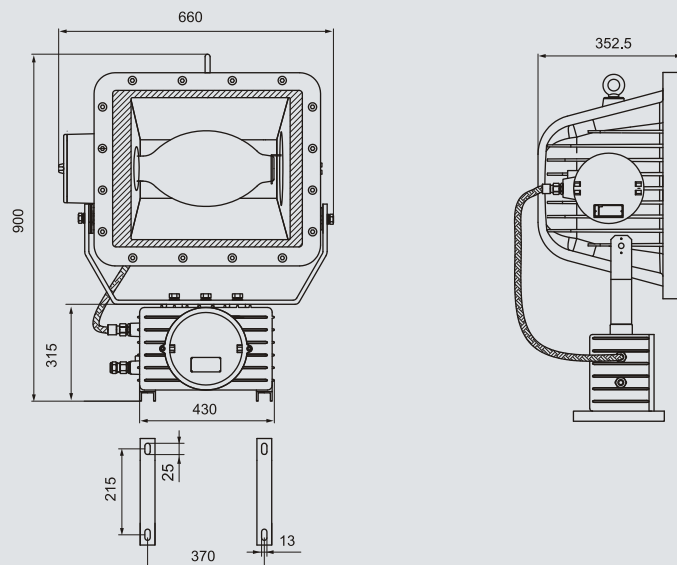


Photometric data

BAT53-125

Photometric data of
100W metal halide lamp

Rated luminous flux:9000lm;
Luminous intensity distribution cd/1000lm




70W Metal halide lamp*0.56
70W High pressure sodium lamp*0.67
100W High pressure sodium lamp*1.06
80W High pressure mercury lamp*0.41
125W High pressure mercury lamp*0.68
150W Metal halide lamp*1.66

Angle	CP	Angle	CP
0	1948	50	1370
5	1945	55	612
10	1953	60	385
15	1963	65	236
20	1950	70	131
25	1955	75	66
30	1839	80	37
35	1733	85	0
40	1649	90	0
45	1588		

BAT53-250

Photometric data of
250W metal halide lamp

Rated luminous flux:23000lm;
Luminous intensity distribution cd/1000lm




175W Metal halide lamp*0.61
150W High pressure sodium lamp*0.65
250W High pressure sodium lamp*1.22
175W High pressure mercury lamp*0.32
250W High pressure mercury lamp*0.55

Angle	CP	Angle	CP
0	3162	50	1419
5	3197	55	975
10	3183	60	613
15	3128	65	354
20	3073	70	202
25	3010	75	127
30	2790	80	65
35	2505	85	5
40	2191	90	3
45	1806		

BAT53-400

Photometric data of
400W metal halide lamp

Rated luminous flux:38000lm;
Luminous intensity distribution cd/1000lm



400W High pressure sodium lamp*1.26

Angle	CP	Angle	CP
0	5982	50	2330
5	6178	55	1849
10	6103	60	443
15	6054	65	338
20	5706	70	234
25	5342	75	111
30	4751	80	52
35	4235	85	12
40	3517	90	4
45	2765		



We can provide lighting design and data by professional lighting software DIALUX based upon simulated site situation on request.

Accessories

Picture	Name	Ordering code	Weight (kg)
	Explosion-proof electronic trigger (125, 250, 400 type)	61034	0.30
	125 Explosion-proof capacitor	53012	0.45
	250 Explosion-proof capacitor	53013	0.45
	400 Explosion-proof capacitor	53014	0.55
	125 Movable support	53015	1.80
	250 Movable support	53016	2.35

Note: Ballast see P1/19